
Unit: mm

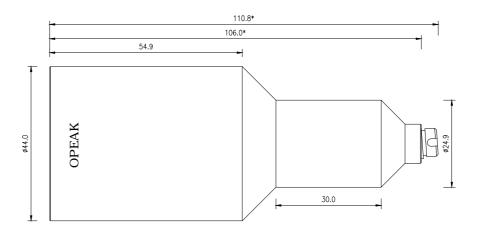

1.Designed wavelength:780 nm

2.MFD: 5 um

3.1/e^2 Diameter: 18.2 mm 4.Divergence: 0.049 mrad

5.B type AR coating, reflection ratio less than 0.5%.

6.FC/APC adapter

*Length tolerance: +/-5 mm

For information only Not for manufacturing purpose

LCA-20-E		_C/	4-2	20-	B
----------	--	-----	-----	-----	---

OPEAK optoelectronics

Mfg. Phase			se	Weight	scale