
Unit: mm

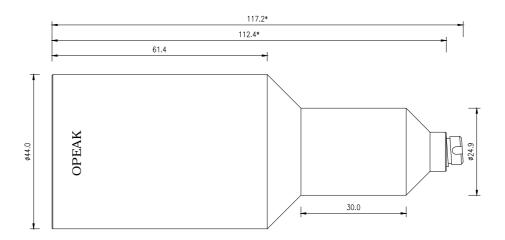

- 1.Designed wavelength:1550 nm
- 2.MFD: 10.4 um
- 3.1/e^2 Diameter: 18.6 mm 4.Divergence: 0.101 mrad
- 5.C type AR coating, reflection ratio less than 0.5%.
- 6.FC/APC adapter

*Length tolerance: +/-5 mm

For information only Not for manufacturing purpose

LCA-20-C	L	C_{ℓ}	۷-	-2	0	_(C
----------	---	------------	----	----	---	----	---

OPEAK optoelectronics

Mfg. Phase			se	Weight	scale	